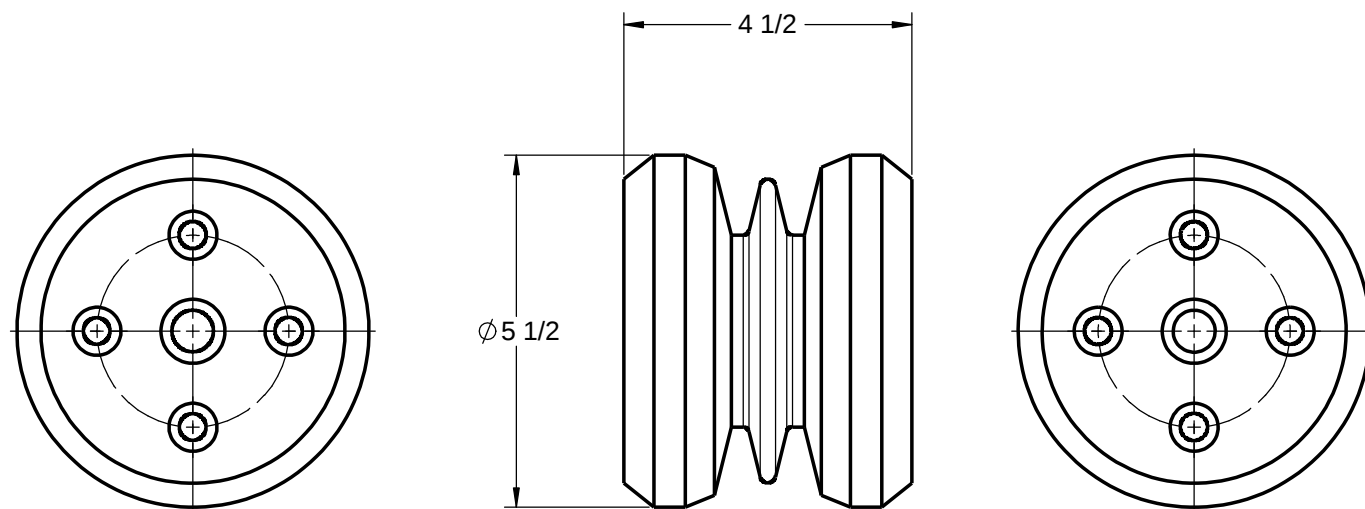




GENERAL NOTES AND SPECIFICATIONS

1. BASIC IMPULSE LEVEL: 75 kV
2. BODY MATERIAL: INDOOR BIS-A EPOXY, RED
3. INSERT MATERIAL: ZINC PLATED STEEL
4. WEIGHT: 6 lb(s)













COMMON OPTIONS

CHOOSE TOP AND BOTTOM MOUNTING CONFIGURATION FROM TABLE BELOW
OTHER MOUNTING CONFIGURATIONS ARE ALSO AVAILABLE UPON REQUEST

SERIES ITEM	CONFIG
105-308-01	A8A8
105-308-02	A8B2
105-308-03	B2B2
105-308-04	B2B3
105-308-05	B2B6
105-308-06	B4B4
105-308-07	B4B5
105-308-08	B6B6
105-308-09	B7B7
105-308-10	A8B6
105-308-11	A8B8
105-308-12	B4B6
105-308-13	A1A1

STANDARD MOUNTING INSERT CONFIGURATION

A1  1X 1/2-13 UNC 7/8	A8  1X 3/4-10 UNC 7/8	A9  1X 5/8-11 UNC 7/8	B2  2X 1/2-13 UNC 3/4 Ø3 BCD	B3  2X 1/2-13 UNC 3/4 Ø3 BCD	B4  2X 1/2-13 UNC 3/4 1X 3/4-10 UNC 7/8 Ø3 BCD	105-308-16	A9A9
						105-308-20	A1A6
						105-308-21	A8B7
						105-308-22	A9B6
						105-308-23	B5B7
B5  2X 1/2-13 UNC 3/4 1X 3/4-10 UNC 7/8 Ø3 BCD	B6  4X 1/2-13 UNC 3/4 Ø3 BCD	B7  4X 1/2-13 UNC 3/4 1X 3/4-10 UNC 7/8 Ø3 BCD	B8  2X 5/8-11 UNC 7/8 Ø3 BCD			105-308-24	B5B6
						105-308-29	A9B7
						105-308-30	A1B2
						105-308-31	A1B6
						105-308-41	A1B7
POLYCAST 486 SHEPPARD ST WINNIPEG, MB CANADA R2X 2P8 www.polycast.ca						CONFIDENTIALITY THIS DRAWING ALONG WITH INFORMATION AND RELATED DOCUMENTS MAY NOT BE DUPLICATED OR RELEASED IN WHOLE OR IN PART WITHOUT WRITTEN PERMISSION AND IS THE EXCLUSIVE PROPERTY OF POLYCAST INTERNATIONAL	
CATALOG REFERENCE PII30A SERIES - 8kV/75kV BIL INSULATOR						SERIES NUMBER 105-308-00	