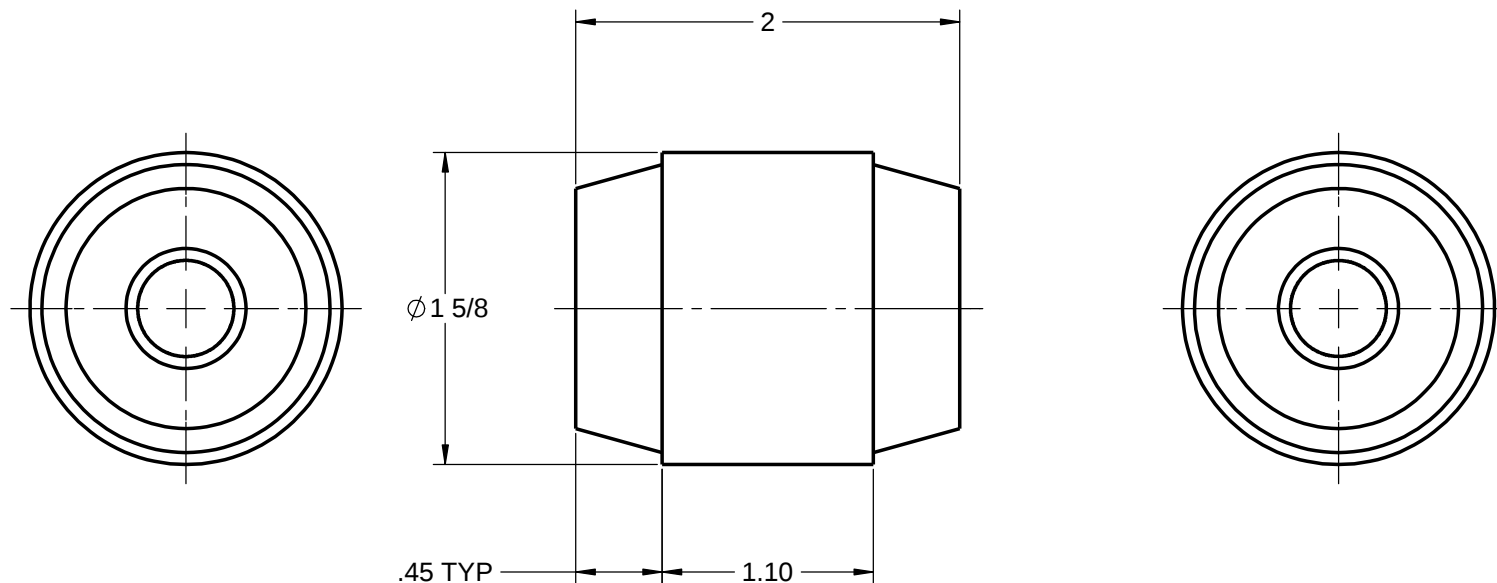









GENERAL NOTES AND SPECIFICATIONS

1. BASIC IMPULSE LEVEL: 45 kV
2. BODY MATERIAL: INDOOR BIS-A EPOXY, RED
3. INSERT MATERIAL: ZINC PLATED STEEL
4. WEIGHT: 0.3 lb(s)



STANDARD MOUNTING INSERT CONFIGURATION

C1	 1X 3/8-16 UNC ∇ 5/8	D4	 1X 1/4-20 UNC ∇ 3/8								
E4	 1X 1/2-13 UNC ∇ 5/8	G3	 1X M6 X 1 ∇ 10mm	M2	 1X M8 X 1.25 ∇ 14mm						
POLYCAST  486 SHEPPARD ST WINNIPEG, MB CANADA R2X 2P8 www.polycast.ca				CONFIDENTIALITY THIS DRAWING ALONG WITH INFORMATION AND RELATED DOCUMENTS MAY NOT BE DUPLICATED OR RELEASED IN WHOLE OR IN PART WITHOUT WRITTEN PERMISSION AND IS THE EXCLUSIVE PROPERTY OF POLYCAST INTERNATIONAL				CATALOG REFERENCE PIIDA SERIES - 2.4kV/45kV BIL INSULATOR		SERIES NUMBER 105-412-00	

COMMON OPTIONS

CHOOSE TOP AND BOTTOM MOUNTING CONFIGURATION FROM TABLE BELOW
OTHER MOUNTING CONFIGURATIONS ARE ALSO AVAILABLE UPON REQUEST

SERIES ITEM	CONFIG
105-412-41	C1C1
105-412-49	E4E4
105-412-60	D4D4
105-412-72	G3G3
105-412-75	M2M2